

SAILSetc Catalogue Number	<b>0-GNK-IOM-ST-METAL</b> (also 005M)		
Fitting Description	ball raced gooseneck/kicking strap		
Applications	IOM, 36R, 36/600, US One Metre, other small yachts		
Drawing Code	PI 0-GNK-IOM-BR-METAL	<i>copyright SAILSetc 2024</i>	
Contents	Qty	Item	
	1	gooseneck/kicking strap unit	
	1	boom end fitting as specified	
	4	No 2 x 9 mm self tapping screw	
	1	1.8 mm diameter drill	

Boom end fitting options with this unit are:


103-SE-ST, 103-RD-ST-100, 103-RD-ST-110, 103-RD-ST-TRANCE, 103-VAR-ST or no boom end fitting.

Use boom end fitting 103-RD-ST-110 with:

12 mm OD SAILSetc carbon tube and 11.0 mm OD SAILSetc alloy boom tube.

Use boom end fitting 103-RD-ST-100 with:

10 mm lightweight SAILSetc alloy tube.

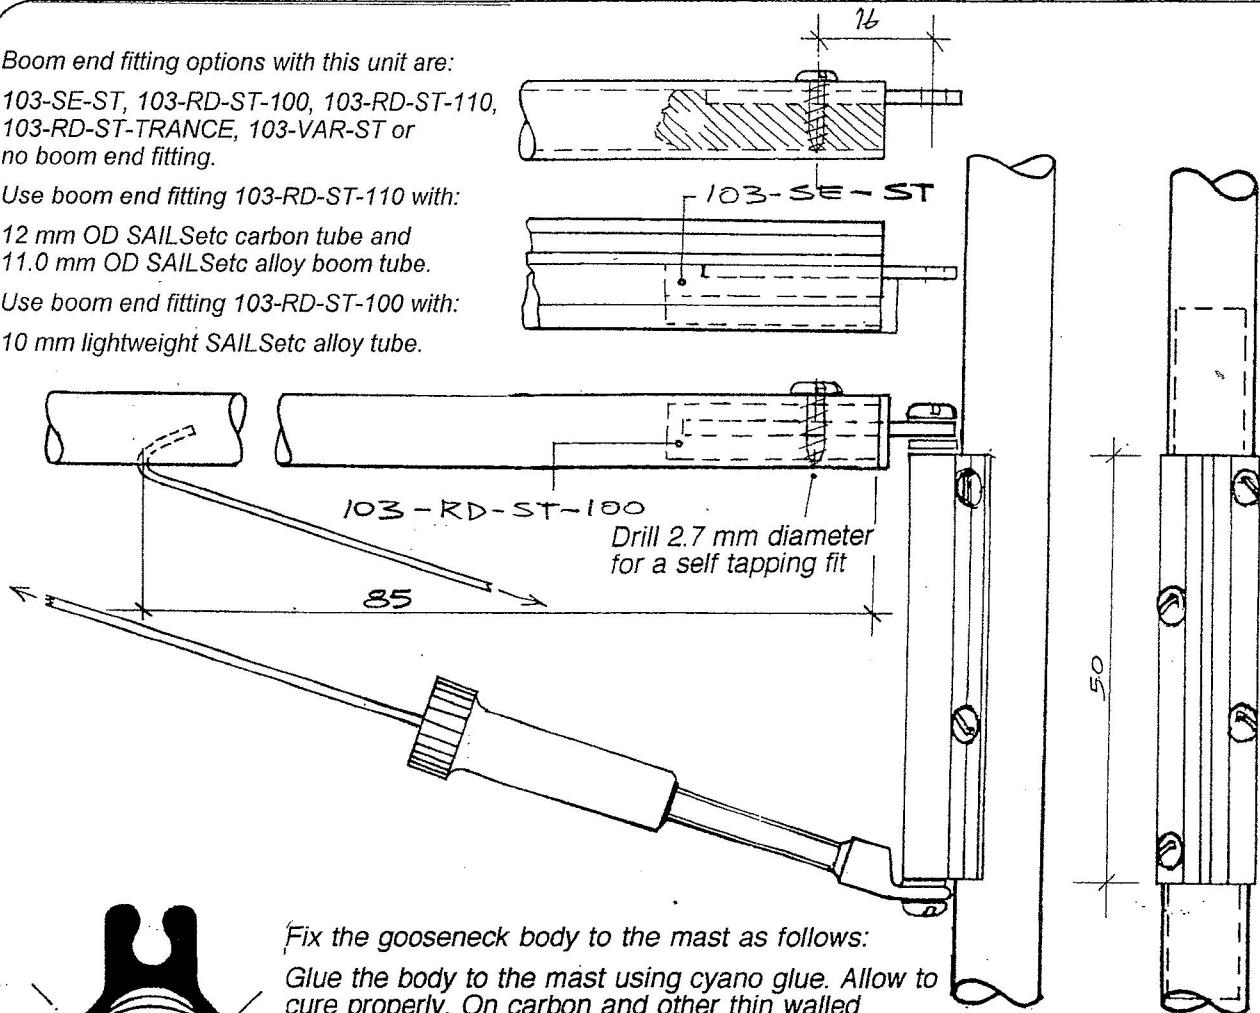

**Fix the gooseneck body to the mast as follows:**

Glue the body to the mast using cyano glue. Allow to cure properly. On carbon and other thin walled masts there should be a reinforcing tube inside the mast tube in this area. Use the 1.8 mm drill provided to drill staggered holes where shown at right angles to the body of the gooseneck.

Carefully drive in the small pan head screws. Be aware that they are a tight fit in the holes and cannot be driven in directly. Screw clockwise half a turn and then back a quarter of a turn. Repeat until driven home.

