

15RG-COMP

SAILSetc Product Code

Fitting Description

Gooseneck with compression strut – for 8 mm and 5/16" masts

Applications

RG65, FOOTY & other small yachts

Drawing Code

Product Information

PI 15RG

copyright SAILSetc 2016


Contents

Qty 1
2
1
1


Item

gooseneck body unit with 2 tangs & compression strut
No 1 x 9 mm pan head screw
1.0 mm diameter twist drill
100 mm x 1.0 mm diameter wire

Attach the body of the gooseneck to the mast by drilling three 1.0 mm diameter holes through the body and into the mast tube. Cut 3 x 15 mm lengths of 1.0 mm wire and use as 'nails' in the holes.

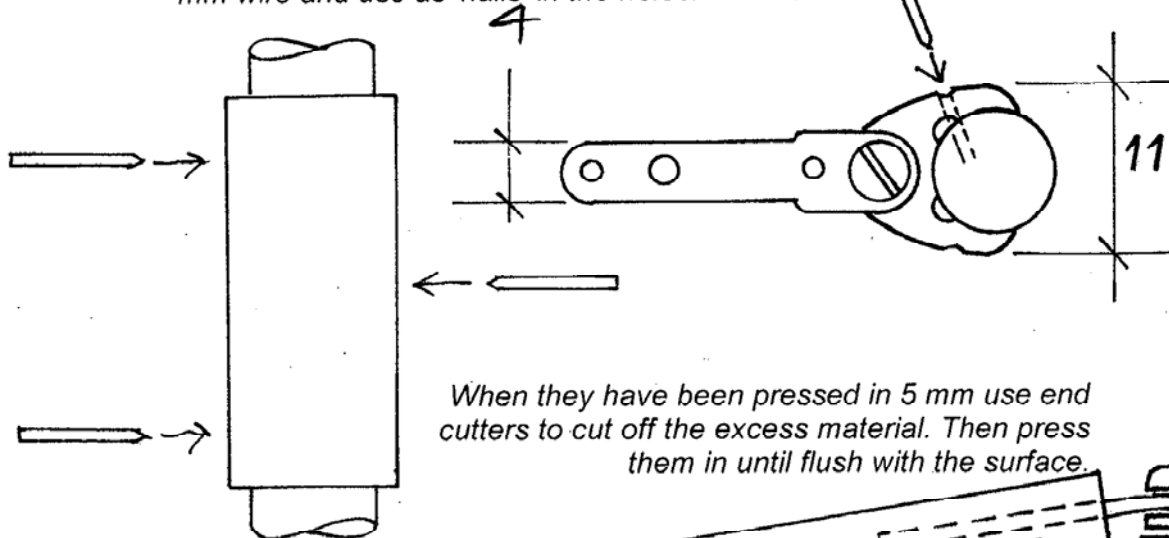

When they have been pressed in 5 mm use end cutters to cut off the excess material. Then press them in until flush with the surface.

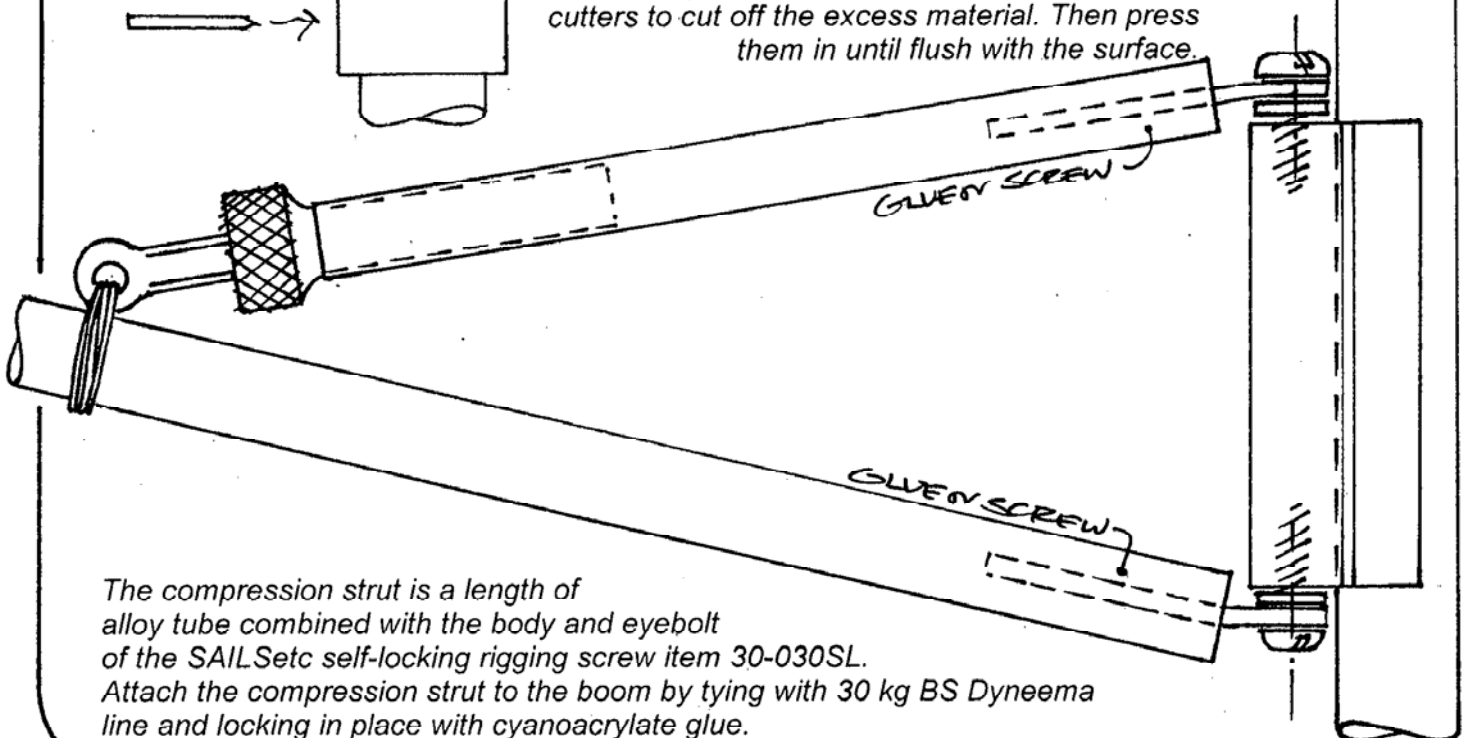

The compression strut is a length of alloy tube combined with the body and eyebolt of the SAILSetc self-locking rigging screw item 30-030SL.

Attach the compression strut to the boom by tying with 30 kg BS Dyneema line and locking in place with cyanoacrylate glue.