

SAILSETC Catalogue Number

7

Fitting Description

gooseneck/kicking strap

Applications

round masts & carbon fibre GROOVY, A Class

Drawing Code

Product Information **PI 7**




copyright SAILSetc 2015

Contents


Qty	Item
1	gooseneck/kicking strap unit
1	No 4 x 9 mm pan head screw
4	No 2 x 9 mm pan head screw
1	boom end fitting, 103F
2	cable ties, plastic
1	1.8 mm diameter drill

Use the boom end fitting, item 103f, by lining the inside of the boom end with 8 mm internal diameter tube.

Alternatively bond the tang into the end of the main boom using epoxy resin and add the self tapping screw when it is cured.

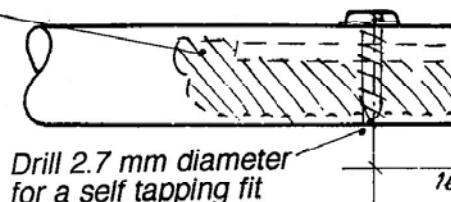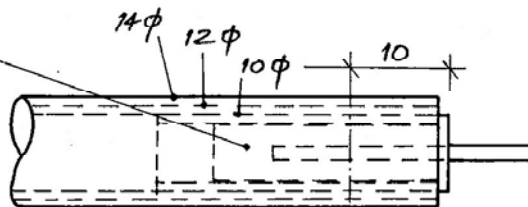

Drill 2.7 mm diameter for a self tapping fit

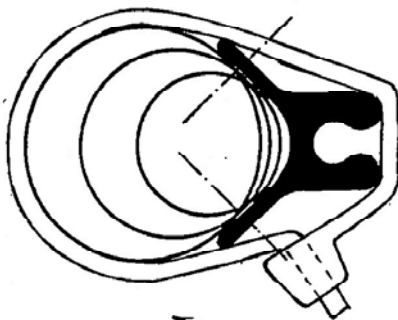

Fix the gooseneck body to the mast as follows:

Glue the body to the mast using cyano glue. Allow to cure properly. On carbon and other thin walled masts there should be a reinforcing tube inside the mast tube in this area. Use the 1.8 mm drill provided to drill staggered holes where shown at right angles to the body of the gooseneck.

Carefully drive in the small pan head screws. Be aware that they are a tight fit in the holes and cannot be driven in directly. Screw clockwise half a turn and then back a quarter of a turn. Repeat until driven home.

Add the cable ties around the mast and gooseneck body where shown to provide additional security

