
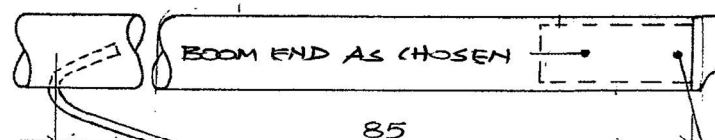


SAILSetc Catalogue Number	0-GNK-IOM-BR-METAL (also 11M)		
Fitting Description	ball raced gooseneck/kicking strap		
Applications	IOM, 36R, 36/600, US One Metre, other small yachts		
Drawing Code	PI 0-GNK-IOM-BR-METAL	copyright SAILSetc 2024	
Contents	Qty	1	Item
		1	gooseneck/kicking strap unit
		4	boom end fitting as specified
		1	No 2 x 9 mm self tapping screw
			1.8 mm diameter drill

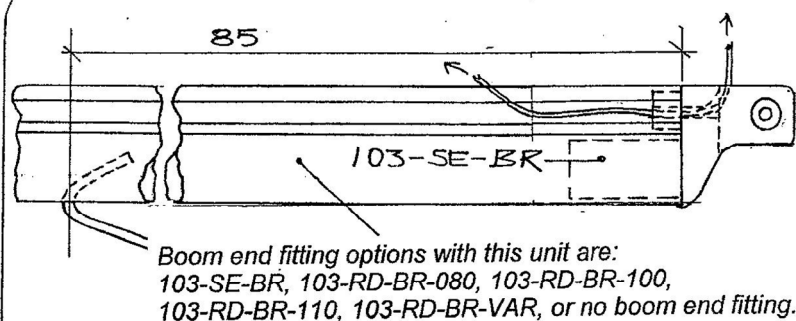

12 mm OD SAILSetc carbon tube
SAILSetc lightweight alloy boom tube
11.0 mm OD boom tube.

Push the boom end into the boom. Drill
a 1.8 mm diameter hole for a self
tapping fit for the small
screw provided.

Fix the gooseneck body
to the mast as follows:

Glue the body to the mast using cyano
glue. Allow to cure properly. On carbon
and other thin walled masts there
should be a reinforcing tube inside the
mast tube in this area. Use the 1.8 mm
drill provided to drill staggered holes
where shown at right angles to the
body of the gooseneck.

Carefully drive in the small pan head screws. Be aware
that they are a tight fit in the holes and cannot be driven
in directly. Screw clockwise half a turn and then back a
quarter of a turn. Repeat until driven home.

