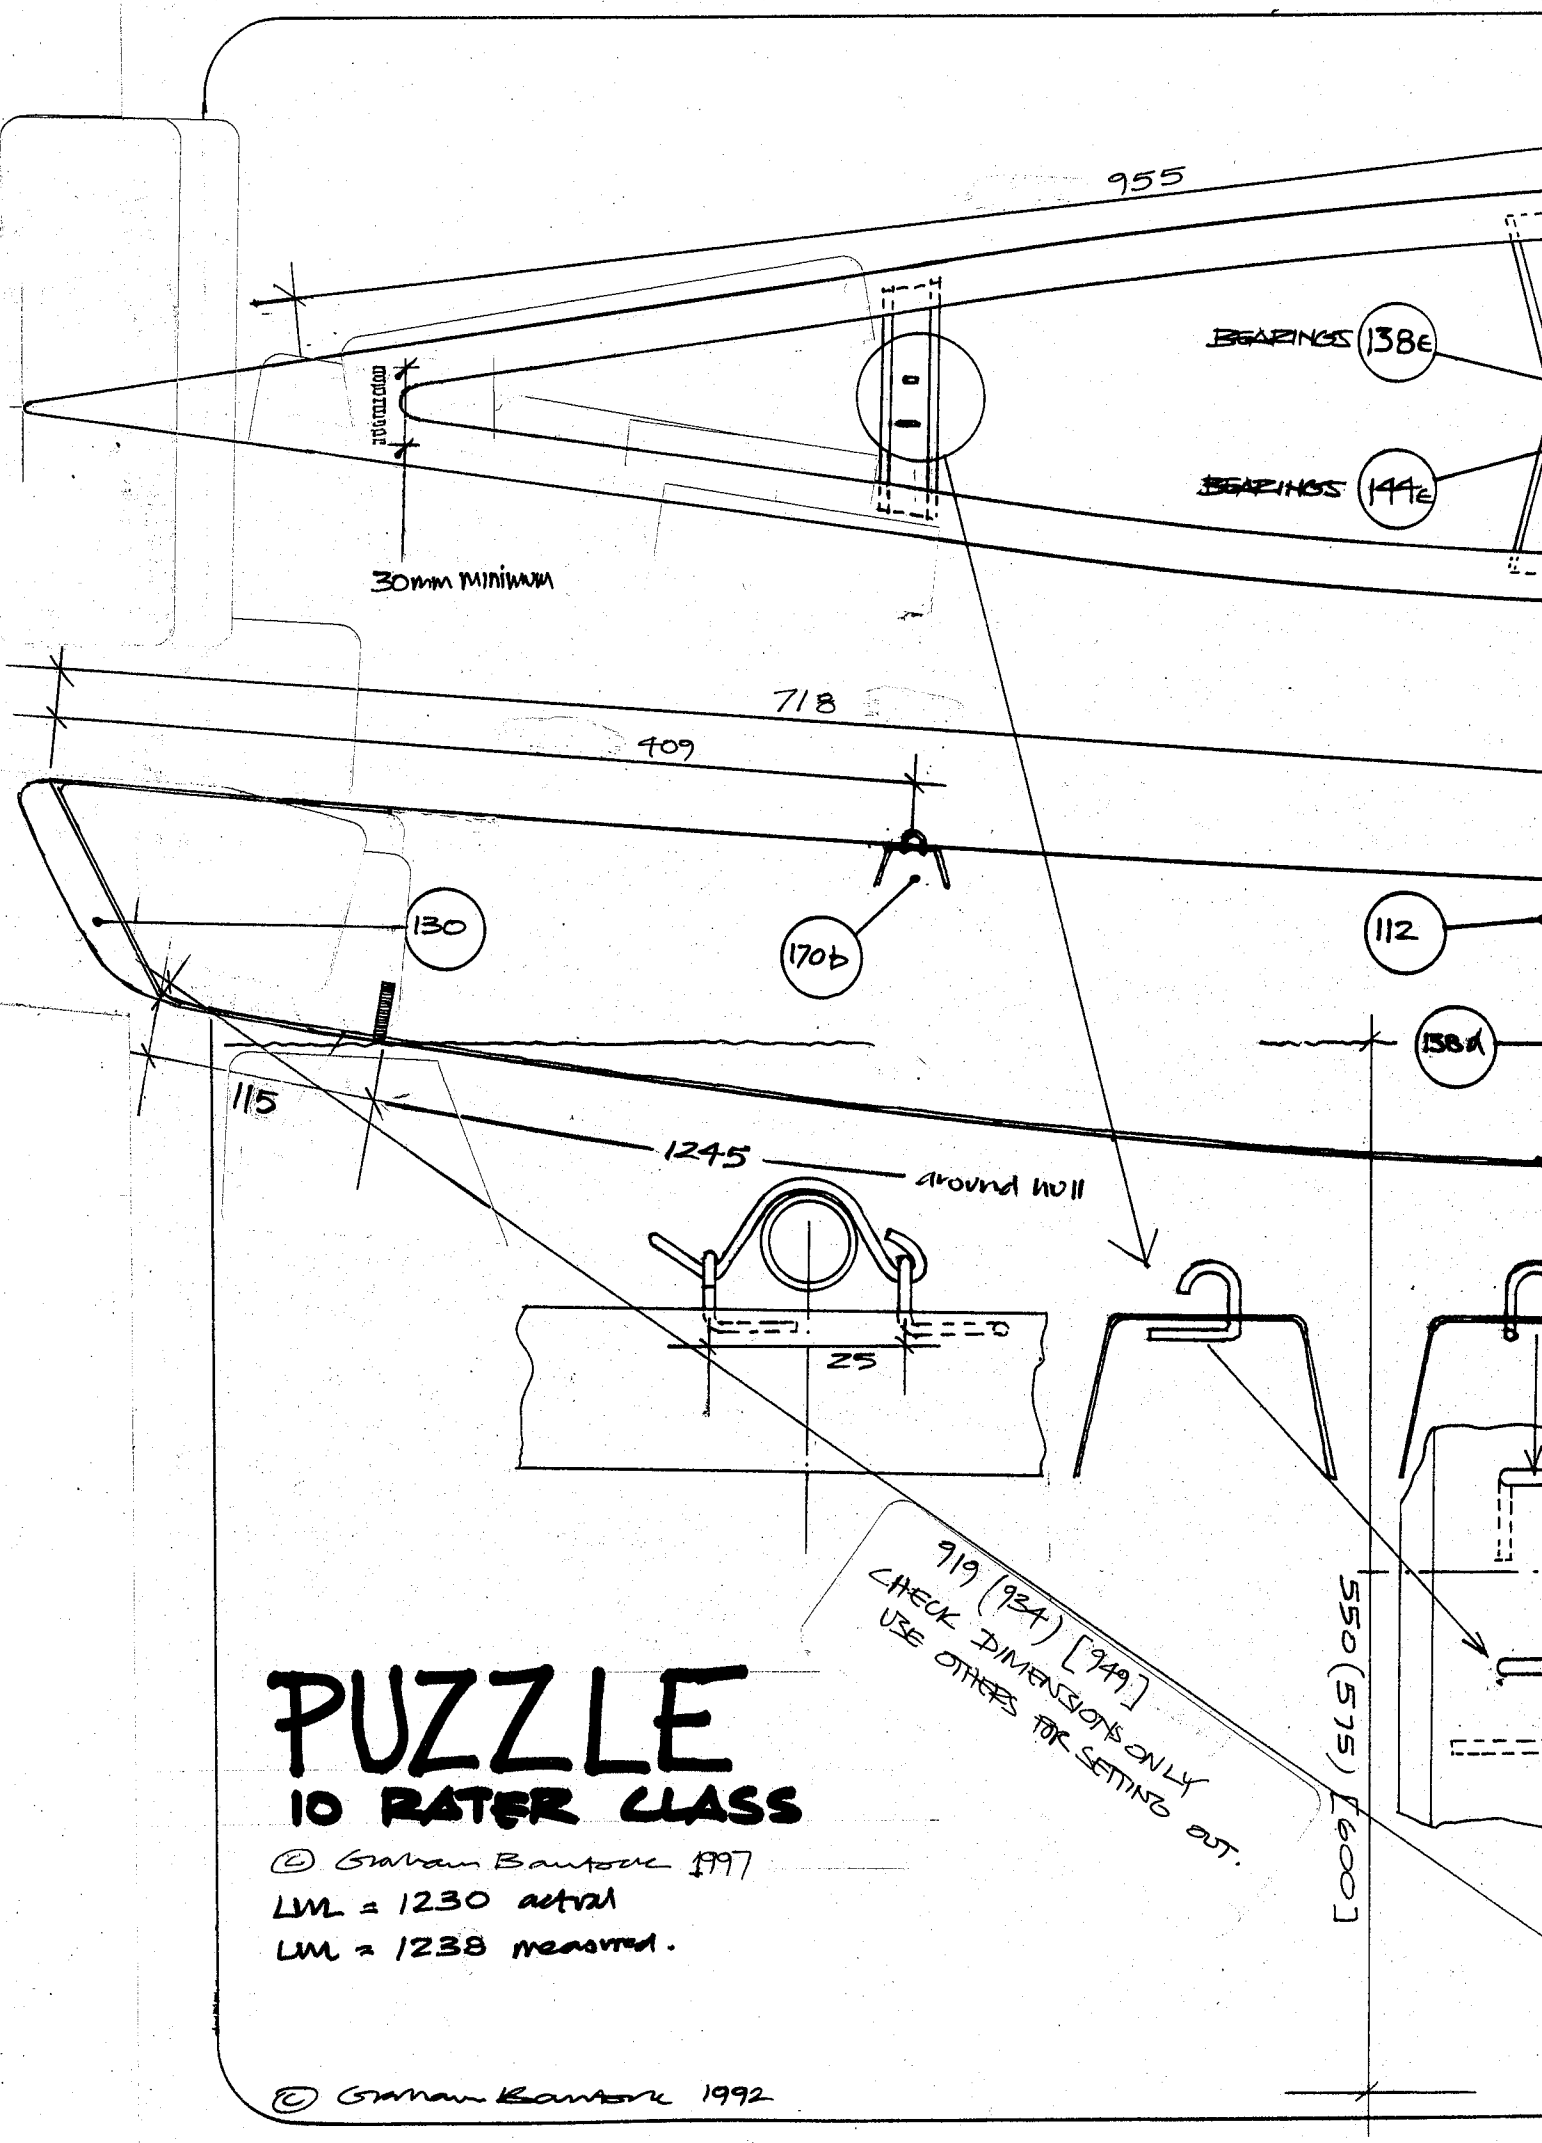
955
BEARINGS 138e
BEARINGS 144e
30mm minimum
718
409
130
170b
112
158d
115
1245
around hull
25
919 (934) [949]
CHECK DIMENSIONS ONLY
USE OTHERS FOR SETTING OUT.
550 (575) [600]
PUZZLE
10 RATER CLASS
© Graham Bancroft 1997
LWL = 1230 actual
LWL = 1238 measured.
© Graham Bancroft 1992

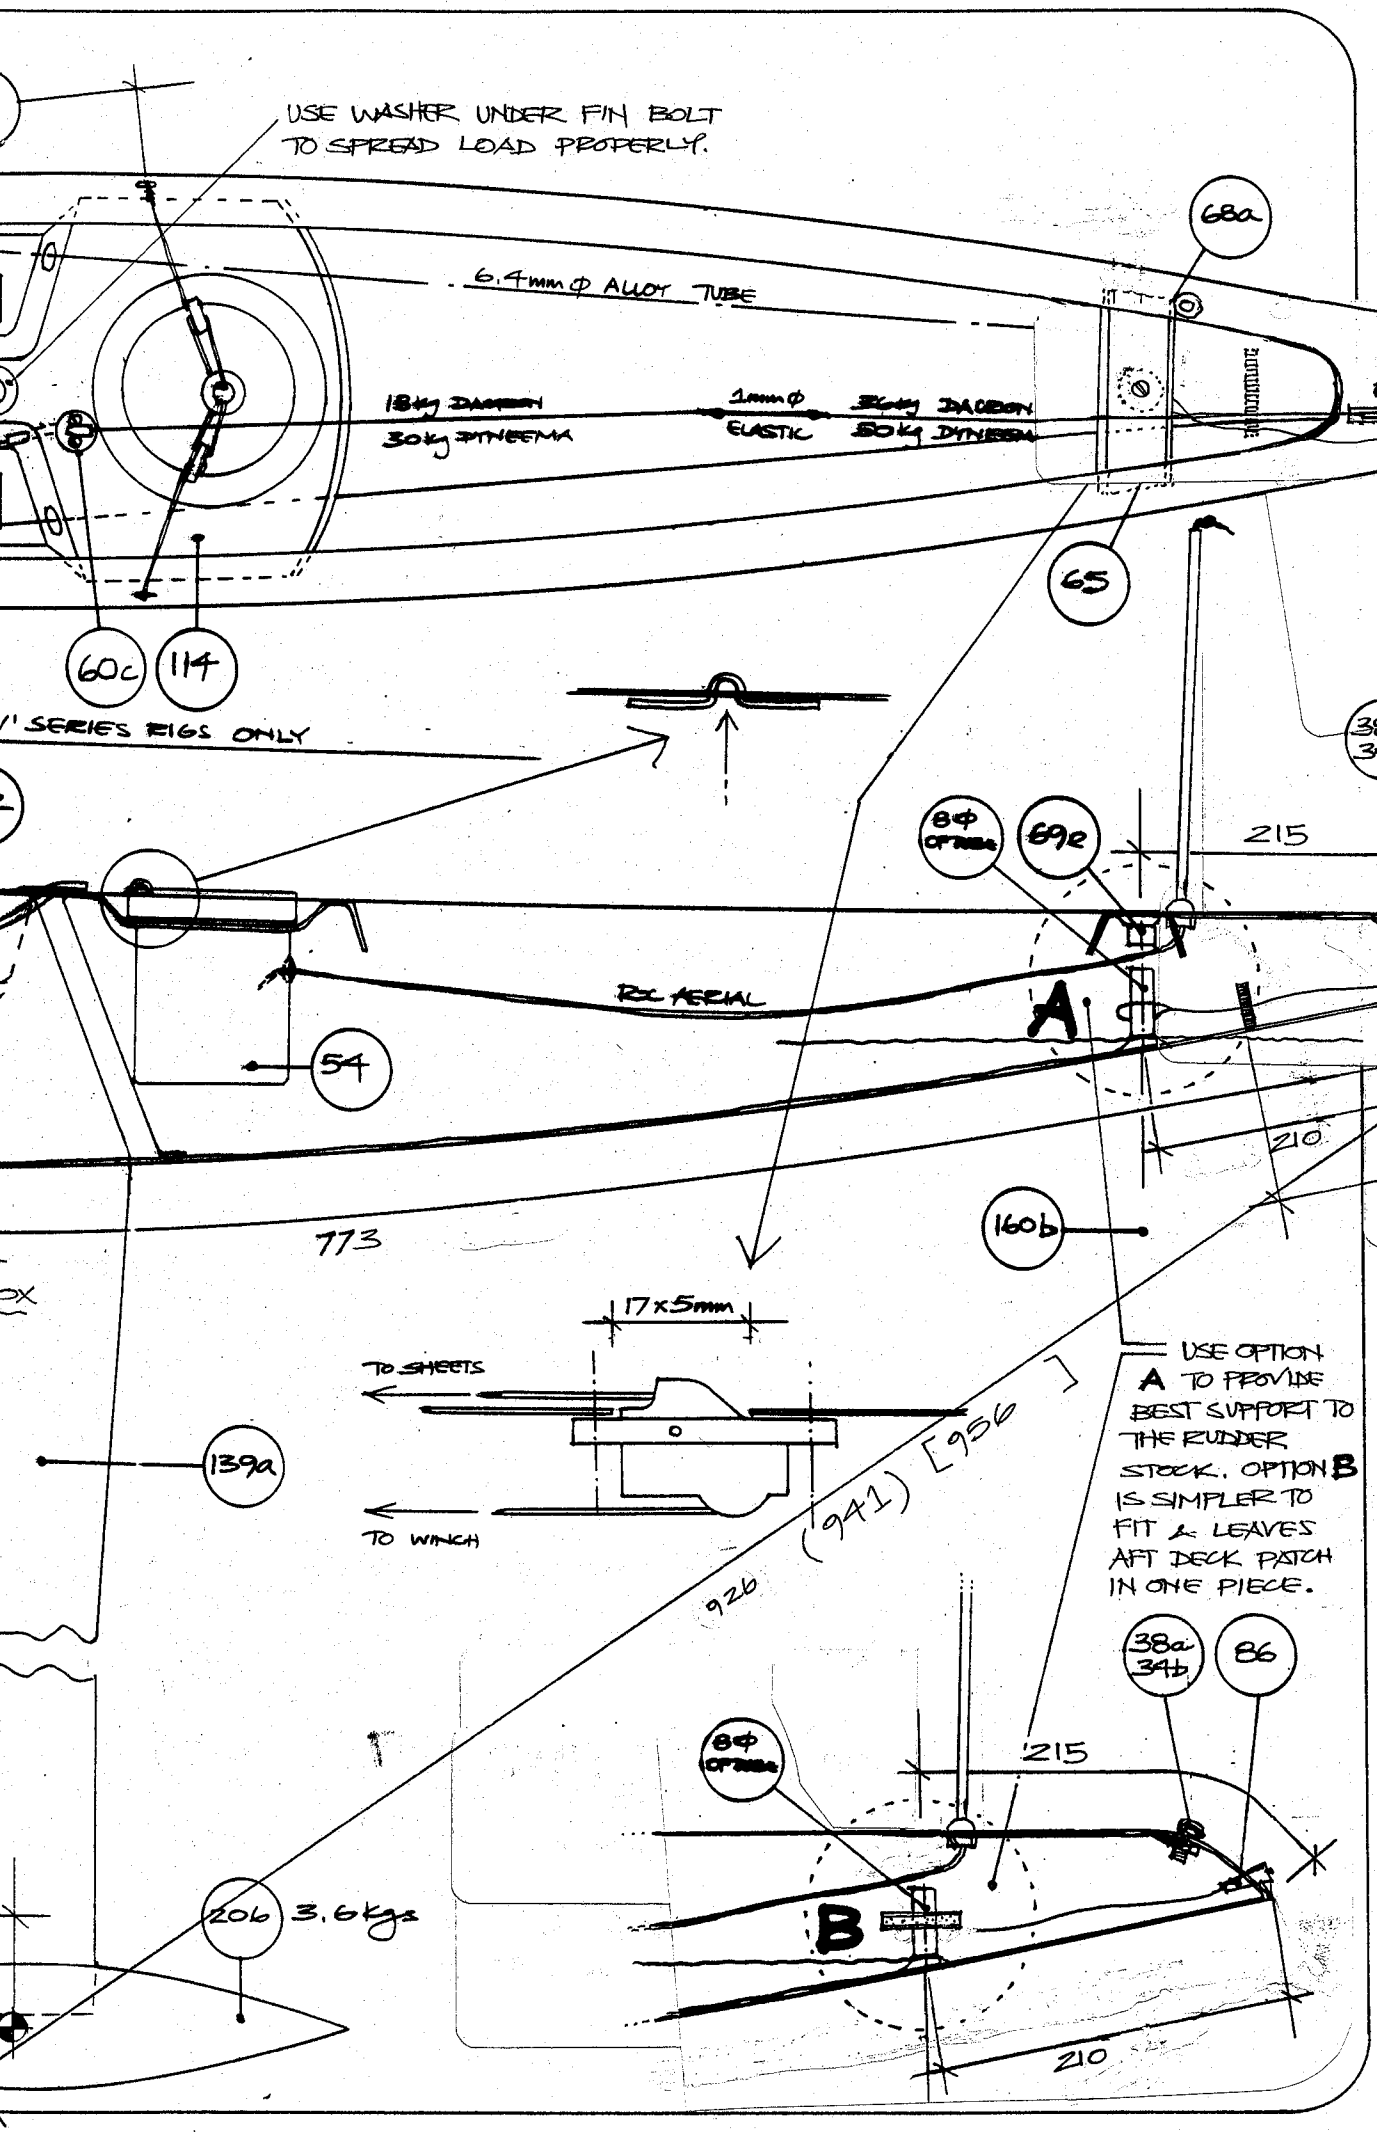
USE WASHER UNDER FIN BOLT TO SPREAD LOAD PROPERLY.
6.4mm Φ ALLOY TUBE
18kg DACRON
30kg DYNEEMA
1mm Φ ELASTIC
35kg DACRON
50kg DYNEEMA
68a
65
60c
114
SERIES RIGS ONLY
38a 34b
86
8Φ OPTIONAL
69a
215
RX AERIAL
A
54
210
145
773
160b
17x5mm
TO SHEETS
TO WINCH
139a
(941) [956]
926
USE OPTION A TO PROVIDE BEST SUPPORT TO THE RUDDER STOCK. OPTION B IS SIMPLER TO FIT & LEAVES AFT DECK PATCH IN ONE PIECE.
38a 34b
86
8Φ OPTIONAL
215
B
206
3.6kgs
210

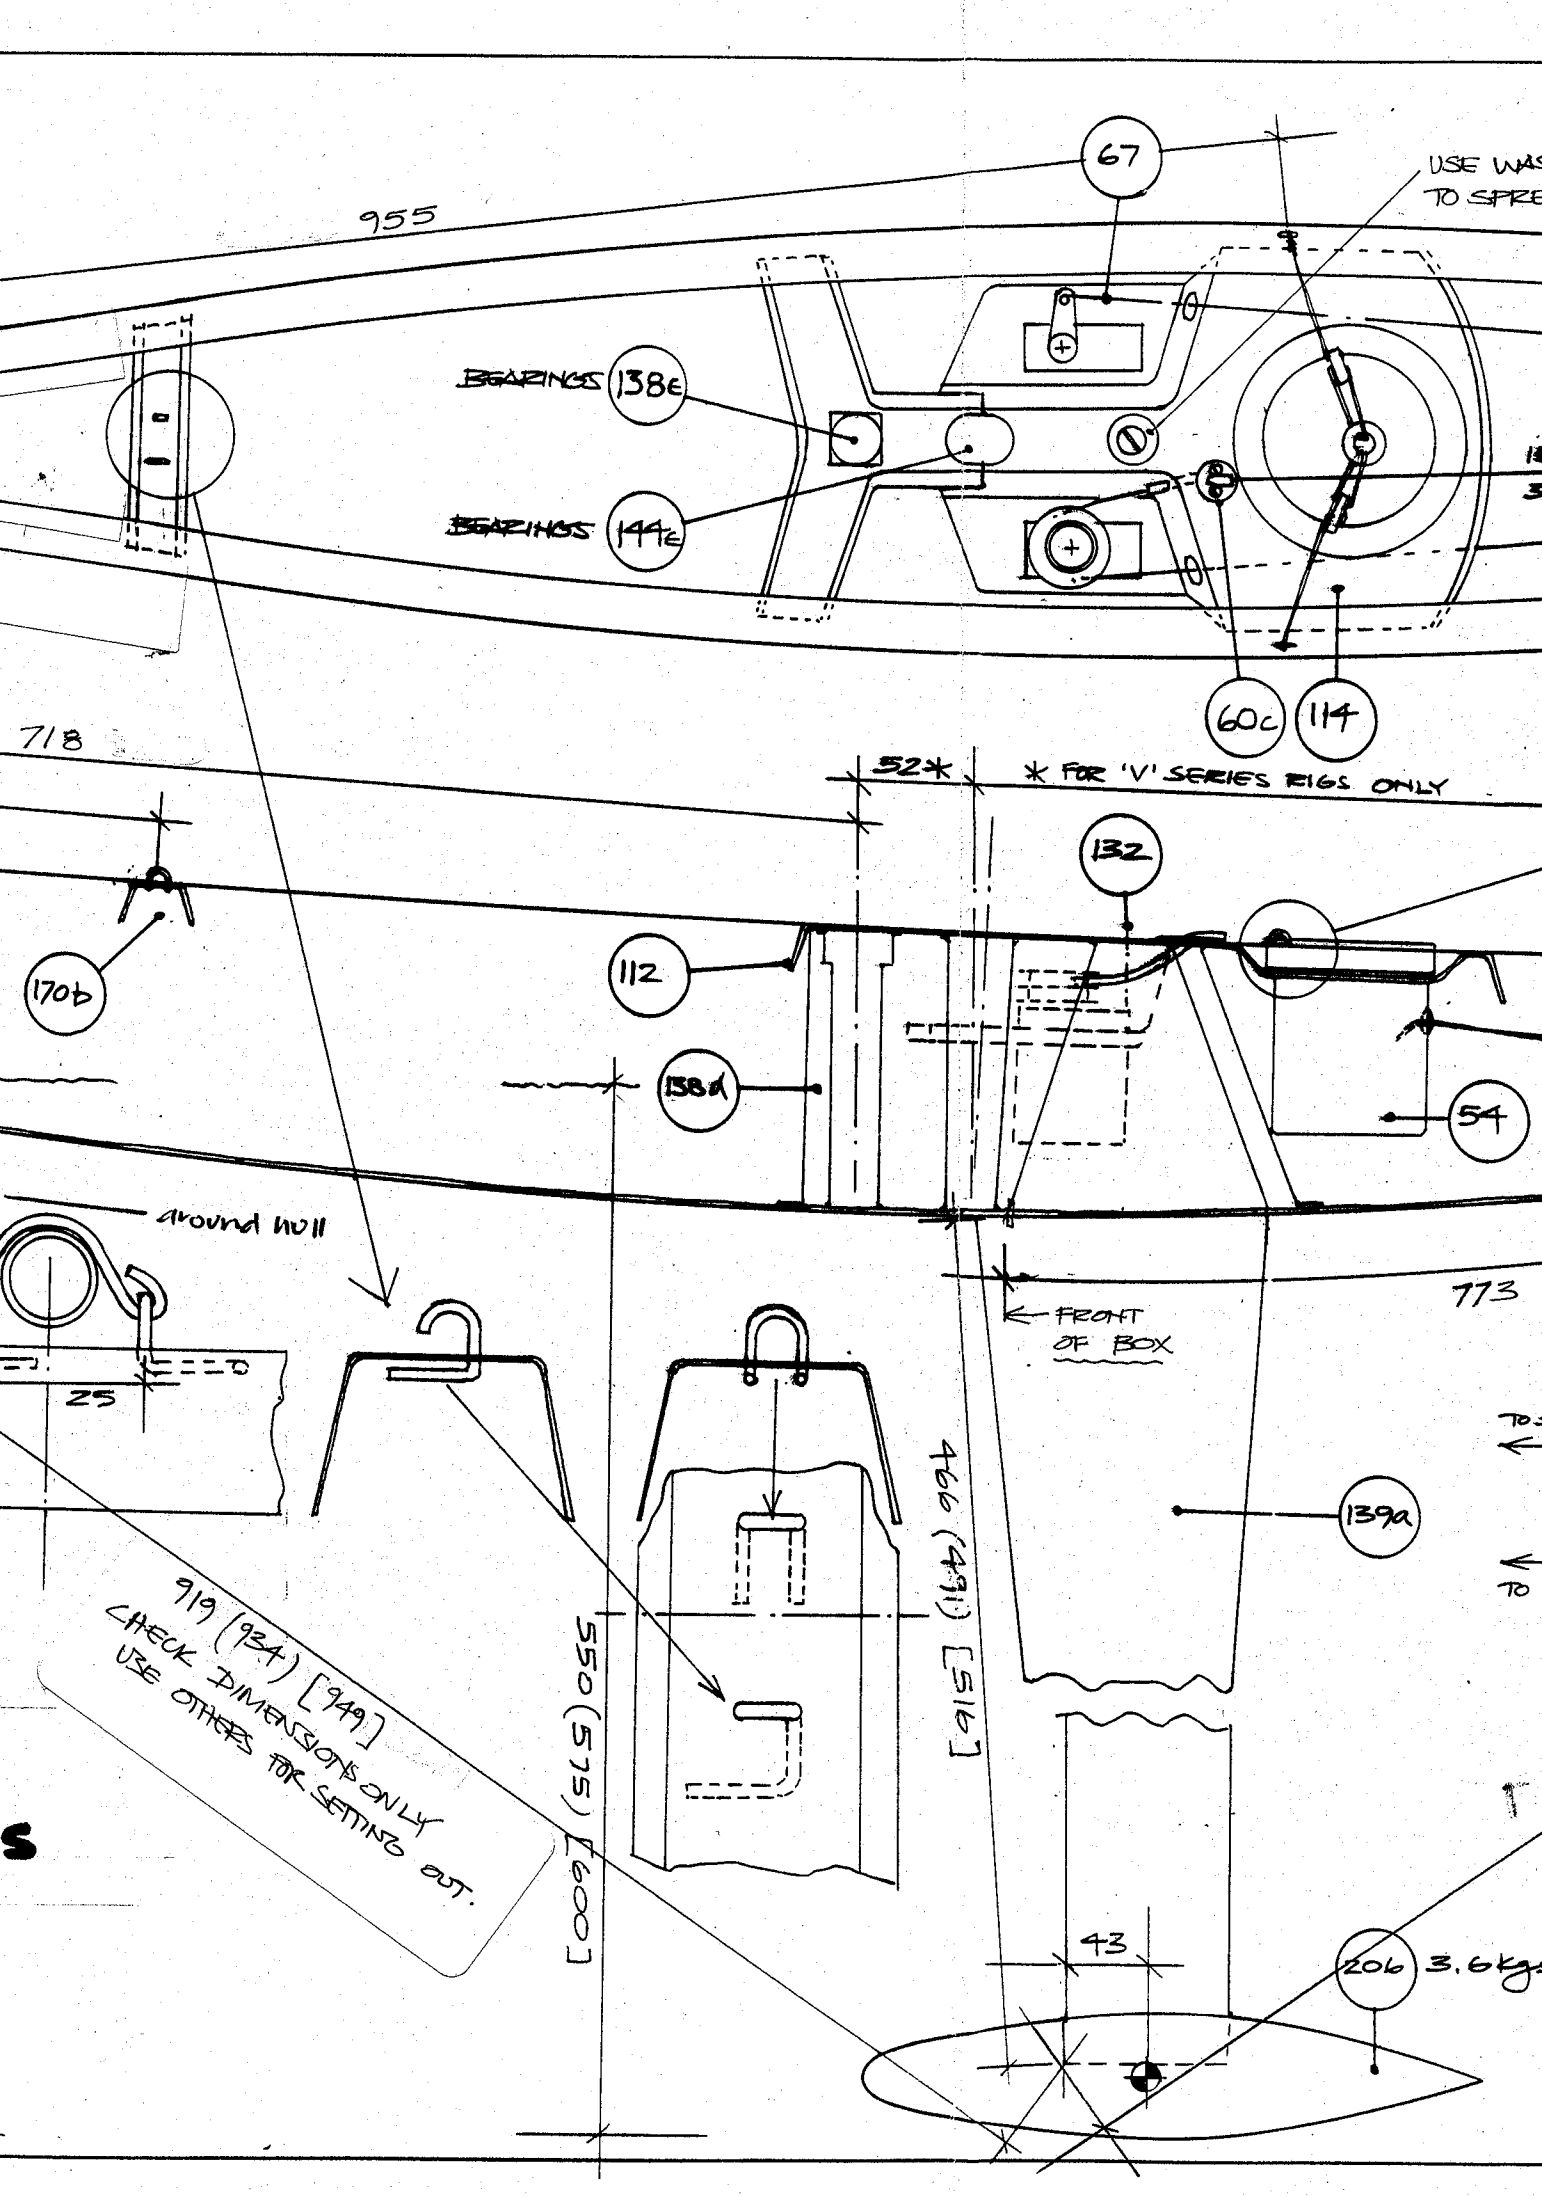
955
67
USE WAS
TO SPRE
BEARINGS 138E
BEARINGS 144E
60C
114
718
52*
* FOR 'V' SERIES RIGS ONLY
132
170b
112
138A
54
around hull
773
FRONT OF BOX
25
139a
919 (934) [949]
CHECK DIMENSIONS ONLY
USE OTHERS FOR SETTING OUT.
550 (515) [600]
466 (491) [516]
43
206
3.6kg