


B16	A	B	C
A	1617	345	2506 OF D
B	1363	295	"
B2	1160	254	"
B3	982	218	"
B4	835	193	"

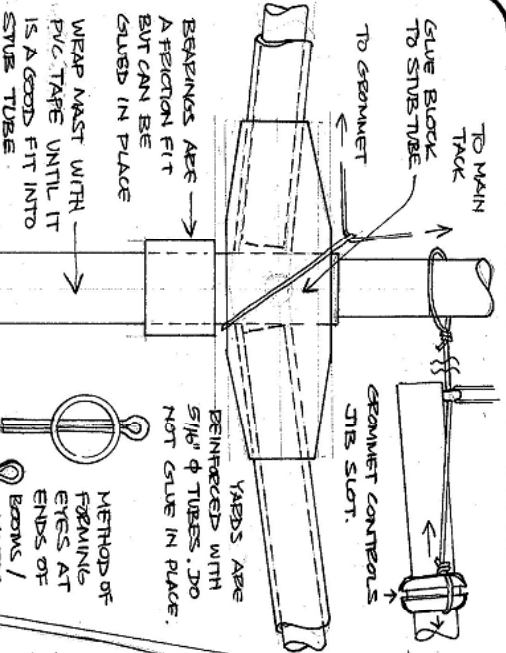


FOR THE B2, B3 & B4 PUS THE MAST SHOULD BE UNWRAPPED WITH CARBON TOW & GLUE (RESIN) WHERE THE FORESTRY HOOK HOLE WILL BE DRILLED.

SOME OVERLAP JOINT FOR 'A' & 'B' EYES GLUE WITH EPOXY RESIN


BEST RESULTS MAY BE OBTAINED WITH LUFF PINS AT THE SEAMS ONLY, HOWEVER INTERMEDIATE EYELETS & EXTRA LUFF PINS ARE PROVIDED

BOWSIE USED TO ADJUST 'LEECH LINE' SO THAT THE TWIST CAN BE CONTROLLED EFFECTIVELY.

BAND FOR MAINSHEET. GLUE IN PLACE WHEN POSITION IS CORRECT.

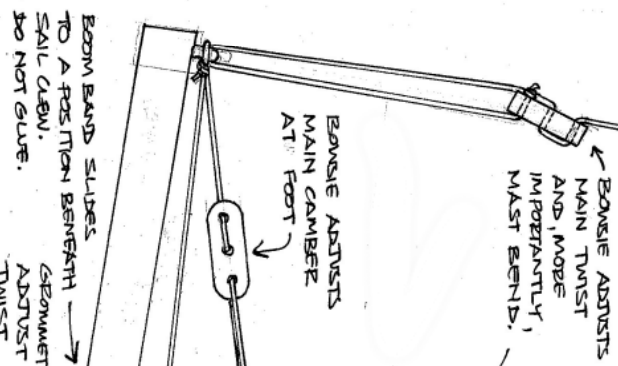

MAST HEAD DETAILS FOR A & B1 EYES

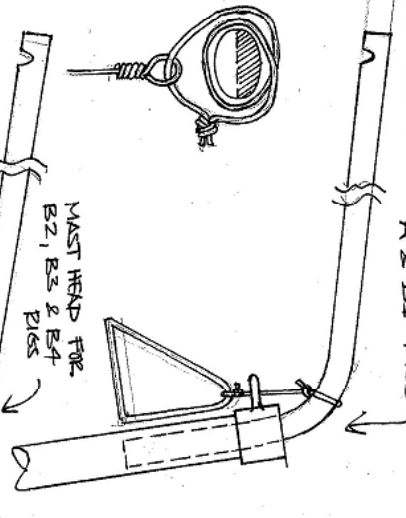

36/600 SWIND BIG KIT DRAWING No. 18
© Ginn & Bannan Dec. 1989. Tel. 037519437 England.

